

[www.bonnel-sa.com](http://www.bonnel-sa.com)



# Z 120

*FIXED WORKING WIDTH MOUNTED PLOUGH*




# A WIDE RANGE FOR TILLAGE

## The headstock

- coupling with copes, cat 2 and 3,
- One-piece pendulum,
- Turnover bushed hollow shaft Ø 125 mm allowing hoses to be routed through the tube,
- Large oblong hole for top link allowing high position of the rear furrows during turnover and keeping horizontal position during transport,
- socket axles on the Ø 70 mm bushed connecting beam,
- integrated tool box.

## The Z-shaped beam

- Perfect integration and erasure of the wheel in working position,
- Rear position of the wheel for better control of working width and better weight transfer on the tractor.

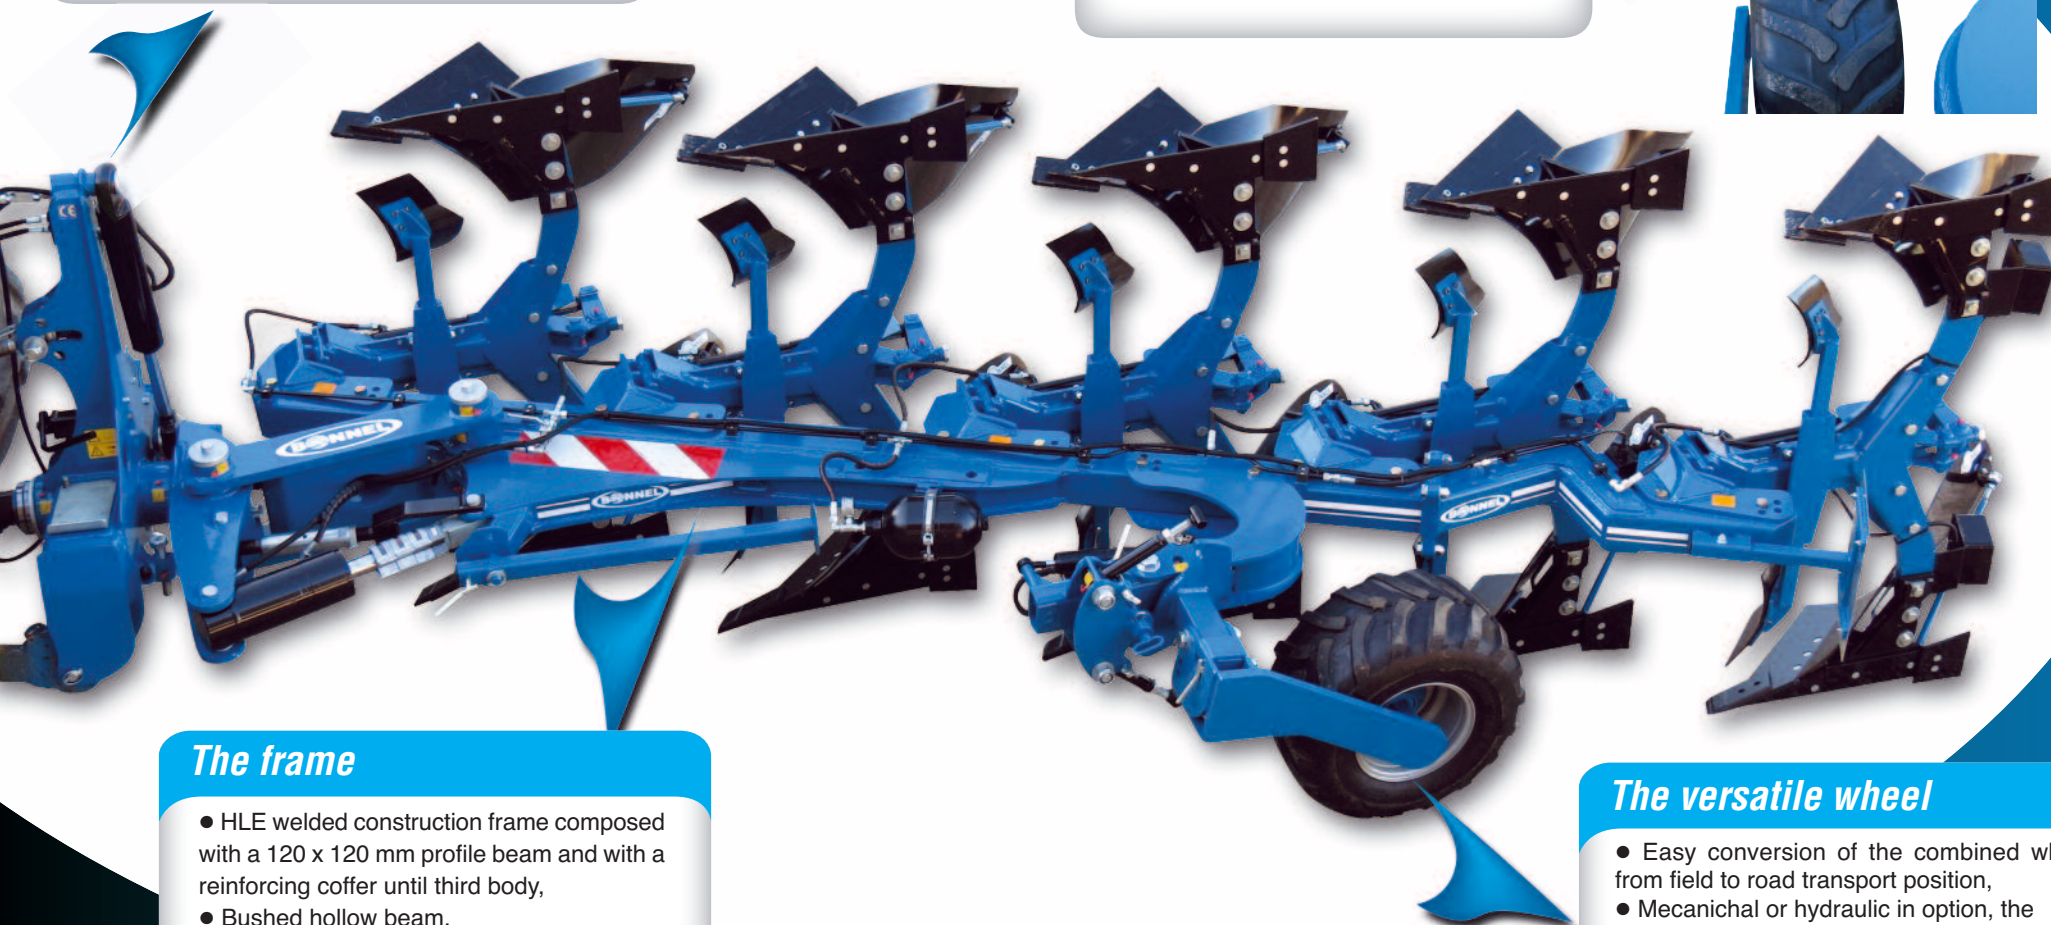

## The frame



- HLE welded construction frame composed with a 120 x 120 mm profile beam and with a reinforcing coffer until third body,
- Bushed hollow beam,
- Parking stand.

## The versatile wheel

- Easy conversion of the combined wheel from field to road transport position,
- Mecanichal or hydraulic in option, the combined wheels are equiped with a shock-absorber for turnover,
- 2 tyres at choice : 320/60-12 and 340/55-16 (optional).



## TECHNICAL DATA Z 120 RANGE



## First furrow at nearest from the tractor



## TYRES



Wheel (Ø 689 mm, width 320 mm)  
with 320/60-12 tyres and 5 holes rim



Wheel (Ø 777 mm, width 342 mm)  
with 340/55-16 tyres and 6 holes rim

## SAFETY



Shearbolts safety



Non stop hydraulic safety

## STANDARD




Plough alignment during  
turnover and mechanical  
adjustment of the first furrow



Adjustable skimmer in high  
and forward position



Integrated traffic lights

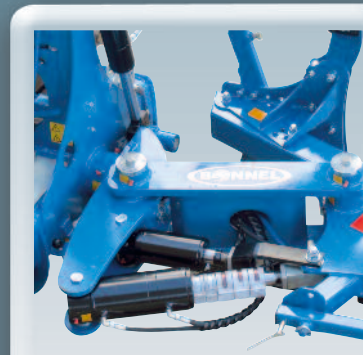

Hydraulic adjustment  
of the first furrow



Hydraulic combined wheel

## OPTIONAL



# THE MODELS

Z 125 nsh



Z 125 sb

	Model	Type	Weight
Shearbolts safety	Z 124 sb	4 furrows (4)	1 390 kg
	Z 125 sb	5 furrows (4 + 1)	1 700 kg
	Z 126 sb	6 furrows (5 + 1)	2 010 kg
Non stop hydraulic safety	Z 124 nsh	4 furrows	1 660 kg
	Z 125 nsh	5 Furrows (4 + 1)	2 150 kg

\* indicative weight with skimmers and without wheel.

# THE WEARING PARTS



## Triplex Moulboards H4/H5

Helicoidal mouldboards for ploughing without strong traction effort. Working 20 to 30 cm. Perfect for winter ploughing, the H5 mouldboard is designed for wide wheeled tractors



## Triplex Moulboard C4/C5

Cylindrical mould boards allowing rapid ploughing with crumbling in heavy soils. C4 mouldboard for 14" width and 18 to 25 cm depth. C5 mouldboard for 16" width and 20 to 35 cm depth.



## Super B mouldboard

Steel or plastic mouldboard with respectively 7 and 18 mm thickness wearing parts for sticky soils.

## Carbide skimmer



Extra wide skimmer for bury ground cover

## Maize skimmer



Facilitates slippage of plant debris without stuffing

## COULTER

- ▶ To be bolted on sep
- ▶ To be welded on sep



## CARBIDE POINTS

- ▶ With carbide reinforcement on the side and on the top.



- ▶ **Reversible**




## BLADES

- ▶ Carbide blade
- ▶ Nr 5 / Nr 6 Blade
- ▶ NSH Blade



## HEELS

- ▶ Cast
- ▶ Steel



**A WIDE RANGE FOR TILLAGE**



[www.bonnel-sa.com](http://www.bonnel-sa.com)

14, route de Conches - 27110 LE NEUBOURG - France

Tél. 02 32 35 16 33 - Fax : 02 32 35 81 84 - E-mail : [info@bonnel-sa.com](mailto:info@bonnel-sa.com)

